


INTERNAL THREAD VERTICAL CHECK VALVE

内螺纹立式止回阀

设计标准 Design standards

1. 阀门的设计和制造按GB/T12234的规定;
2. 阀门的连接端螺纹按GB/T7306或GB/T12716的规定;
3. 阀门的检验和试验按JB/T9092的规定。

1. The design and manufacture of the valve comply with the provisions of GB/T12234;
2. The threaded connection end of the valve shall conform to the regulations of GB/T7306 or GB/T12716;
3. The inspection and testing of the valve shall follow the provisions of JB/T9092.

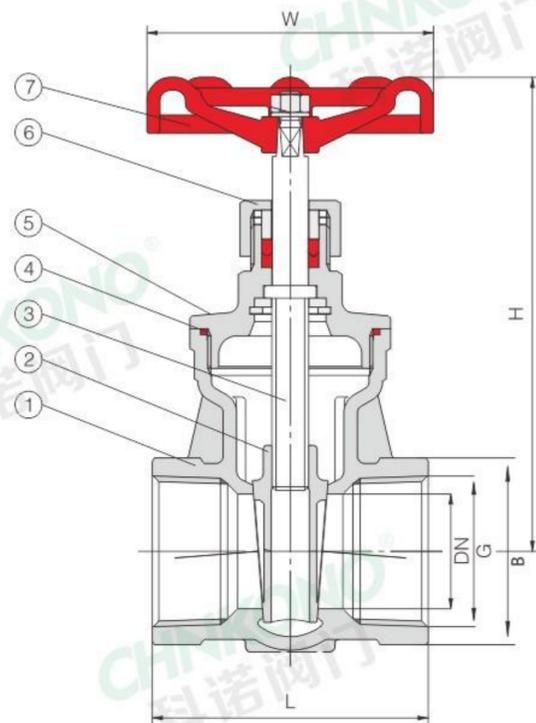

零件表及材质 Part&Material

NO.	零件 Part	材质 Material	
1	阀体 BODY	CF8	CF8M
2	闸板 WEDGE DISC	CF8	CF8M
3	阀杆 STEM	304	316
4	垫片 GASKET	PTFE	
5	阀盖 BONNET	CF8	CF83
6	压盖 GLAND	CF8	CF8M
7	手轮 HANDWHEEL	铝 ALUMINIUM	

主要外形尺寸表 Main external dimensions table

SIZE		L	W	B	H
1/2"	DN15	52	70	25	93
3/4"	DN20	57.5	70	30	100
1"	DN25	61.5	70	37	112
1-1/4"	DN32	71	80	45.5	125
1-1/2"	DN40	74	100	52	142
2"	DN50	83	100	64	162

FEMALE THREAD SHUT-OFF VALVE

内螺纹截止阀


设计标准 Design standards

1. 阀门的设计和制造按ANSI/ASME的规定;
2. 阀门的连接端螺纹按ISO 7或ANSI/ASME BI.20.1的规定;
3. 阀门的检验和试验按API 598的规定。

1. Valves are designed and manufactured in accordance with ANSI/ASME regulations;
2. The connection end thread of the valve is specified by ISO 7 or ANSI/ASME BI.20.1.
3. The inspection and testing of valves are in accordance with the provisions of API 598.

零件表及材质 Part&Material

NO.	零件 Part	材质 Material	
1	阀体 BODY	CF8	CF8M
2	阀瓣 DDISC	F304	F316
3	阀杆 STEM	304	316
4	垫片 GASKET	PTFE	
5	阀盖 BONNET	CF8	CF8M
6	填料垫 PACKING PAD	304	316
7	填料 PACKING	PTFE	
8	压圈 PRESSING RING	TP 304	
9	阀盖螺母 BONNET NUT	CF8	
10	手轮 HANDWHEEL	ZL 101	
11	垫圈 GASKET	A140	304
12	螺母 NUT	A194-8	304

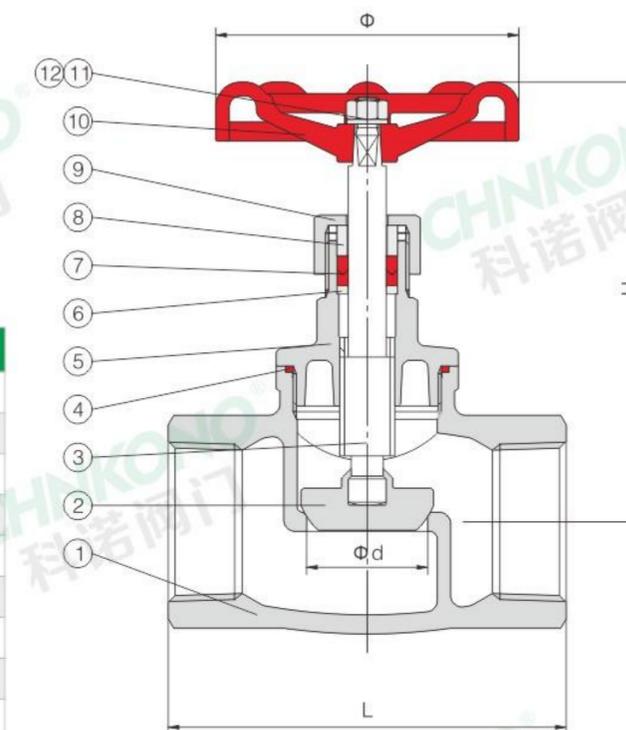


主要外形尺寸表 Main external dimensions table

SIZE		L	H	B
1/2"	DN15	65	90	25
3/4"	DN20	76.5	100	31
1"	DN25	85	108	38
1-1/4"	DN32	98	115	48
1-1/2"	DN40	115	145	54
2"	DN50	135	155	66

S-TYPE THREADED GLOBE VALVE

S型螺纹截止阀

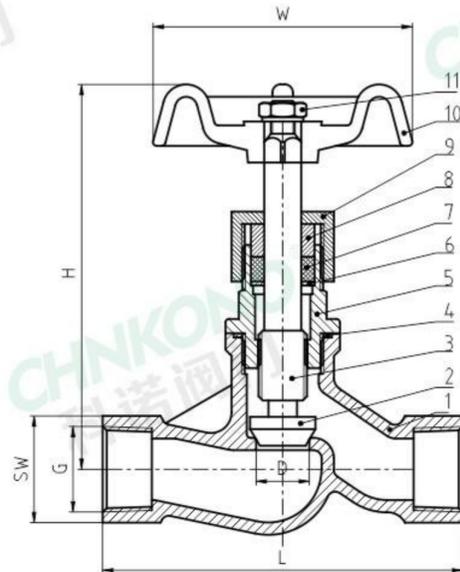

零件表及材质 Part&Material



NO.	零件 Part	材质 Material
1	阀体 BODY	CF8
2	阀瓣 DISC	CF8
3	阀杆 STEM	SS304
4	垫片 GASKET	PTFE
5	螺帽 CAP	CF8
6	垫圈 FLAT GASKET	SS304
7	填料 FILLER	PTFE
8	压盖 GLAND	SS304
9	压盖螺母 GLAND NUT	CF8
10	手轮 HAND WHEEL	IRON
11	螺母 NUT	SS

主要外形尺寸表 Main external dimensions table

SIZE	L	D	SW	W	H
1/2"	88	15	26	64	100
3/4"	98	18	31	64	110
1"	116	20	37.5	71	120
1-1/4"	133	27	47	96	130
1-1/2"	164	34	53.5	96	150
2"	189	40	65.5	107	165

INTERNAL THREADED OPENING CHECK VALVE

内螺纹旋启式止回阀

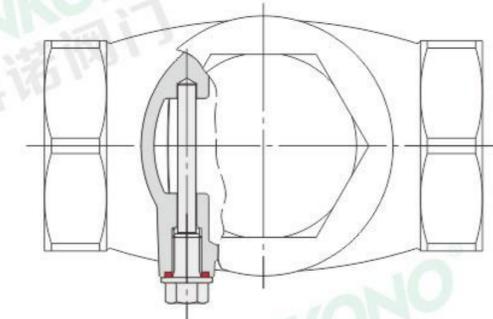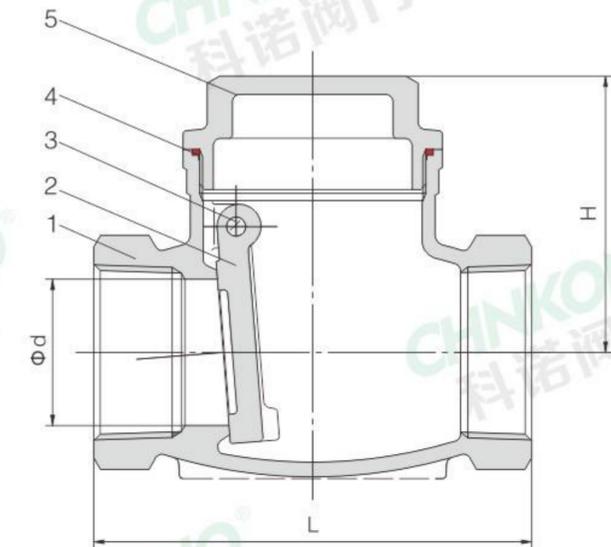

设计标准 Design standards

1. 阀门的设计和制造按ANSI/ASME B16.34的规定;
2. 阀门的连接端螺纹按ISO 7/1或ANSI/ASME B1.20.1的规定
3. 阀门的检验和试验按API 598的规定。

1. Valves are designed and manufactured in accordance with ANSI/ASME B16.34 regulations;
2. The connection end thread of the valve is specified by ISO 7/1 or ANSI/ASME B1.20.1.
3. The inspection and testing of valves are in accordance with the provisions of API 598.

零件表及材质 Part&Material

NO.	零件 Part	材质 Material
1	阀体 BODY	CF8 CF8M
2	阀瓣 DISC	CF8 CF8M
3	销 PIN	304 316
4	密封圈 SEALING RING	PTFE
5	阀盖 BONNET	CF8 CF83

主要外形尺寸表 Main external dimensions table

SIZE	B	L	H	
1/2"	DN15	25	62	41
3/4"	DN20	31	71.5	46
1"	DN25	37.5	84	50
1-1/4"	DN32	46	98	58
1-1/2"	DN40	52	111	63
2"	DN50	64	128	70
2-1/2"	DN65	83	165	90
3"	DN80	97	190	100
4"	DN100	124	237	118

2PC VERTICAL CHECK VALVE


二片式立式止回阀

设计标准 Design standards

1. 阀门的设计和制造按GB/T12235的规定;
 2. 阀门的连接端螺纹按GB/T 7306或GB/T 12716的规定
 3. 阀门的检验和试验按JB/T 9092的规定。
1. The design and manufacture of the valve comply with the provisions of GB/T12235;
 2. The threaded connection end of the valve shall conform to the regulations of GB/T7306 or GB/T12716;
 3. The inspection and testing of the valve shall follow the provisions of JB/T9092.

零件表及材质 Part&Material

NO.	零件 Part	材质 Material	
1	阀体 BODY	CF8	CF8M
2	阀瓣 DISC	CF8	CF8M
3	弹簧 SPRING	304	316
4	垫片 GASKET	PTFE	
5	阀盖 BONNET	CF8	CF83

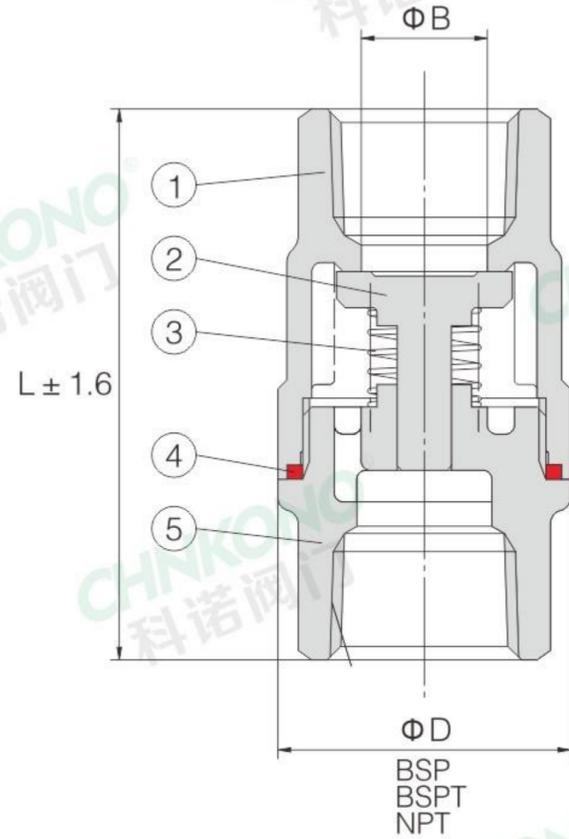


主要外形尺寸表 Main external dimensions table

SIZE		B	L	H
1/2"	DN15	14	58	36
3/4"	DN20	18	66	41
1"	DN25	24	78	48
1-1/4"	DN32	31	82	55
1-1/2"	DN40	37	102	70
2"	DN50	45	114	78
2-1/2"	DN65	63	140	108
3"	DN80	80	166	125
4"	DN100	95	195	155

Y-TYPE FILTER

Y型过滤器

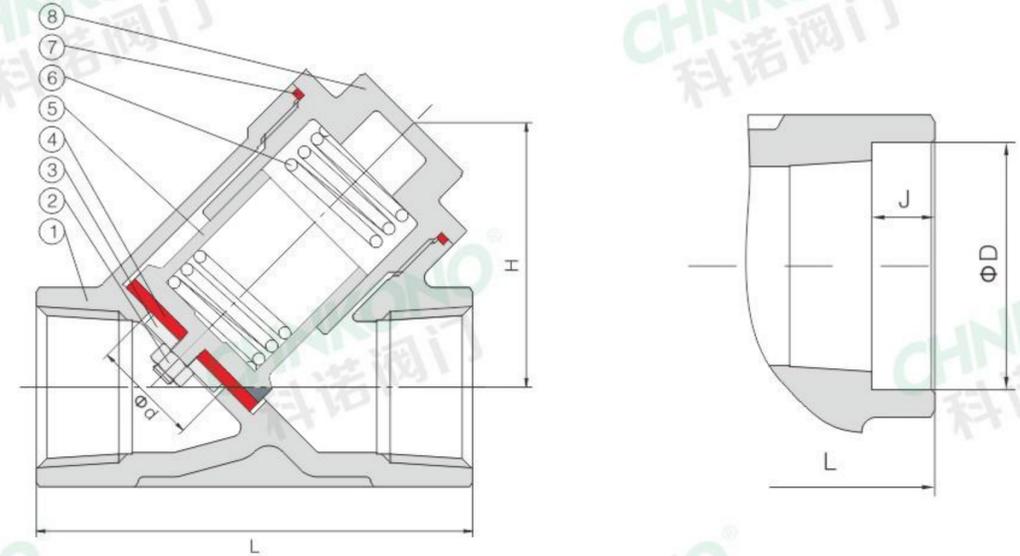

零件表及材质 Part&Material

NO.	零件 Part	材质 Material	
1	阀体 VALVE BODY	CF8	CF8M
2	过滤网 FILTER SCREEN	304	316
3	垫片 GASKET	PTFE	
4	阀盖 BONNET	CF8	CF83

主要外形尺寸表 Main external dimensions table

SIZE		B	L	H
1/2"	DN15	59	40	24
3/4"	DN20	75	50	31
1"	DN25	83	58	37
1-1/4"	DN32	99	65	46
1-1/2"	DN40	105	78	52
2"	DN50	123	96	64
2-1/2"	DN65	163	115	81
3"	DN80	190	140	95
4"	DN100	238	180	121